

Mobile Web



COSC 5384

Dr. Wu lwu@uttyler.edu

JavaScript

```
<script src="scripts.js"></script>
```





JavaScript

```
<script>
```

```
...
```

```
</script>
```



JavaScript

```
<!DOCTYPE html>
<html>
  <head>
    <title>HTML5 : Hello World Example</title>
    <meta name="viewport" content="width=device-width"/>
    <link href="style.css" rel="stylesheet" type="text/css" />
    <script src="scripts.js"></script>
  </head>
  <body>
    <h1>Hello World</h1>
    <script>
      window.alert(5 + 6);
    </script>
  </body>
</html>
```



- Break
- const
- continue
- do ... while
- for
- for ... in
- function
- if ... else
- return
- switch
- throw
- try ... catch
- var
- while ...

Arrays []

Objects { }



localStorage

.clear

.getItem

.removeItem

.setItem



navigator.geolocation

`.getCurrentPosition`

jQuery

jquery.com




ajax

for Asynchronous JavaScript and XML



NORMAL HTTP REQUEST

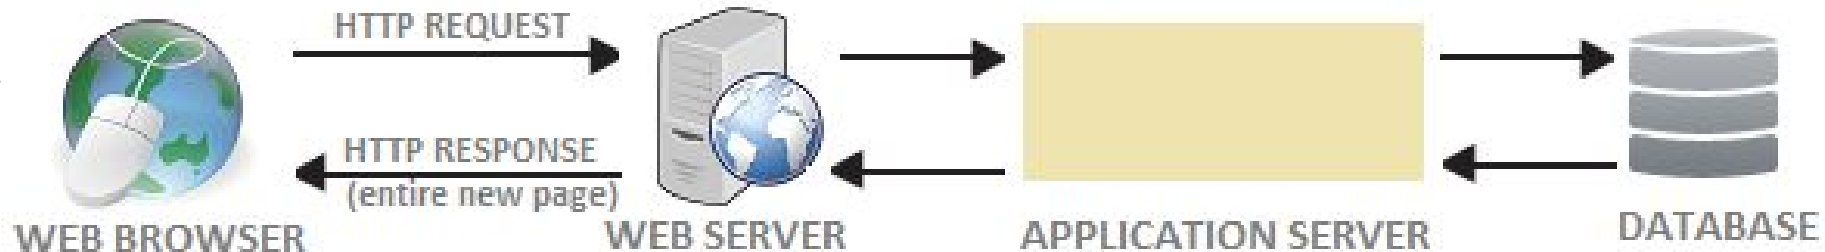

@DotNetCurry.com

AJAX XMLHTTP REQUEST

